

EU3000isRS Wired Remote Start Installation and User Guide


made by Genconnex®

How to use your wired remote

ON/OFF Button

You must leave the key in the "ON" position on the front of the EU3000isRS. Then press this latching button to the "DOWN" position to be in the "ON" position. You may leave this button in the "DOWN" position if you wish to also start the generator with the key. To turn off the generator when its running either press this button to reset it to the "UP" position or turn the key on the front of the generator to "OFF" (or both).

Remember that to start the generator from either this remote or the key on the front of the generator this button must be "DOWN" and the key must be in the "ON" position. The light on this button will flicker when the generator is starting then turn solid bright when the generator is running. This light will turn off when the generator is not running. The generator's battery will NOT be drained by leaving the ON button "ON" or the key on the front of the generator in the "ON" position.

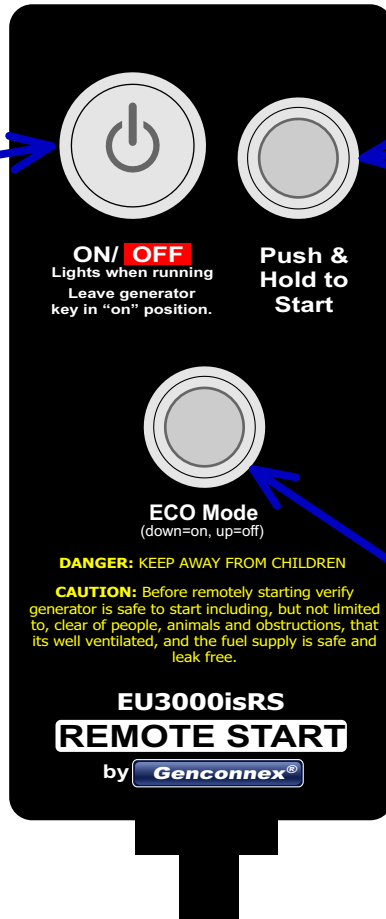

Starter Button

Connect and turn on the fuel, make sure the key on the front of the generator is set to "ON" and the ON/OFF button (left button) is in the "DOWN" position then press and hold this button to start the generator. If you just connected the propane or natural gas you may need to hold this button down for 5-8 seconds a few times in quick succession to work the air in the hose through for the fuel to reach the generator. It will not harm the generator to hold this button down for 5-8 seconds for 3 times in a row. The light on the ON/OFF button to the left will flutter until the generator starts then it will turn solid bright on when the generator has started.

ECO Switch

This switch does the same thing as the ECO switch on the front of the unit. They are in parallel so both switches must be in ECO mode in order for the unit to go into ECO low speed mode. We suggest you leave the switch on the generator set to ECO mode and leave this latching switch UP until you wish to press it "DOWN" to operate in ECO mode.

How to install your wired remote

Genconnex 8 pin connector



Un-screw the protective blue cap then align the remote connector so it 'key's' into the male connector on the generator. This is to make sure the correct pins line up. Push to insert then turn the blue collar on the remote connector to lock the connector to the generator.

genconnexdirect.net

35 Pond Park Road unit 11 Hingham, MA 02043